
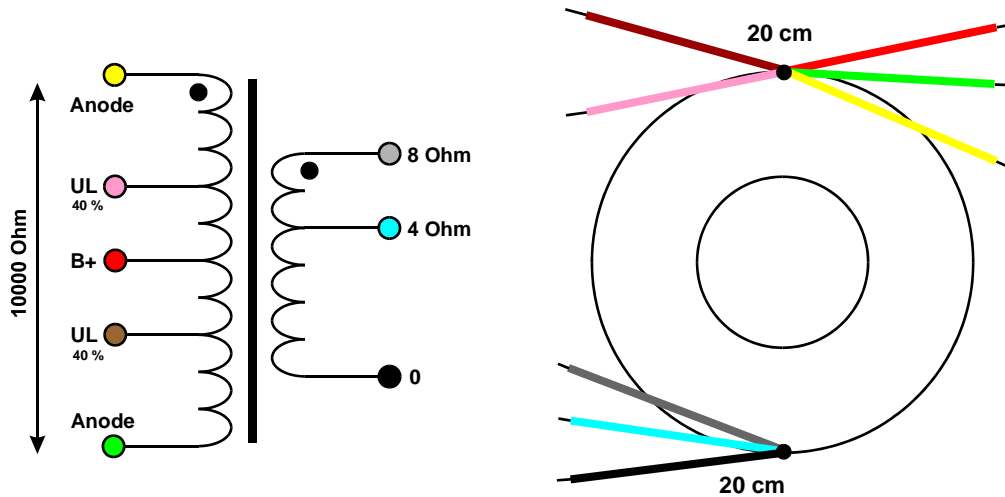


WIDE BANDWIDTH TOROIDAL PUSH-PULL OUTPUT TRANSFORMER

Type	:	VDV-1010-PPE		
Application	:	2 x ECL82 / ECL86		
Primary Impedance	:	Raa = 9.978	[kOhm]	
Secondary Impedance 0 / 4 / 8	:	Rls = 8	[Ohm]	
Turns Ratio Np/Ns	:	Ratio = 35.316	[]	
UL-tap	:	tap = 40	[%]	
-3 dB Frequency Range [Hz to kHz]	:	fl3 = 2.279	fh3 = 80.424	
Nominal Power	:	Pn = 10	[W]	
- 3 dB Power Bandwidth starting at	:	fu = 33	[Hz]	
Total primary Inductance	:	Lp = 580	[H]	
Primary Leakage Inductance	:	lsp = 12	[mH]	
Effective Primary Capacitance	:	cip = 0.3	[nF]	
Total Primary DC Resistance	:	Rip = 96	[Ohm]	
Total Secondary DC Resistance	:	Ris = 0.4	[Ohm]	
Diameter	:	Dia = 93	[mm]	
Height	:	Height = 40	[mm]	
Weight	:	Weight = 1.1	[kg]	

Frequency Response for ECL86: BLK = pentode; BLU = UL; RED = Triode

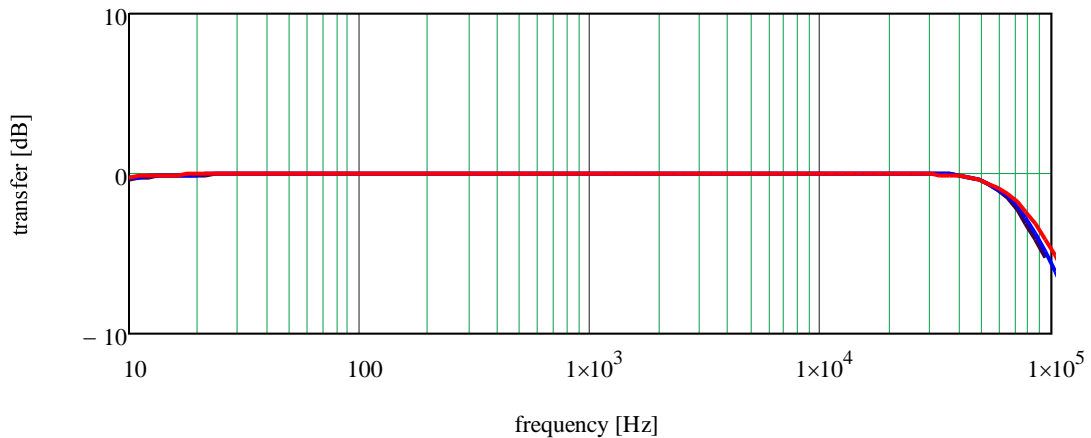

Copyright 2018 ir. bureau Vanderveen; Version 1.8. Design Date: 07-05-2018.
Final specs can deviate 15% or improve without notice