
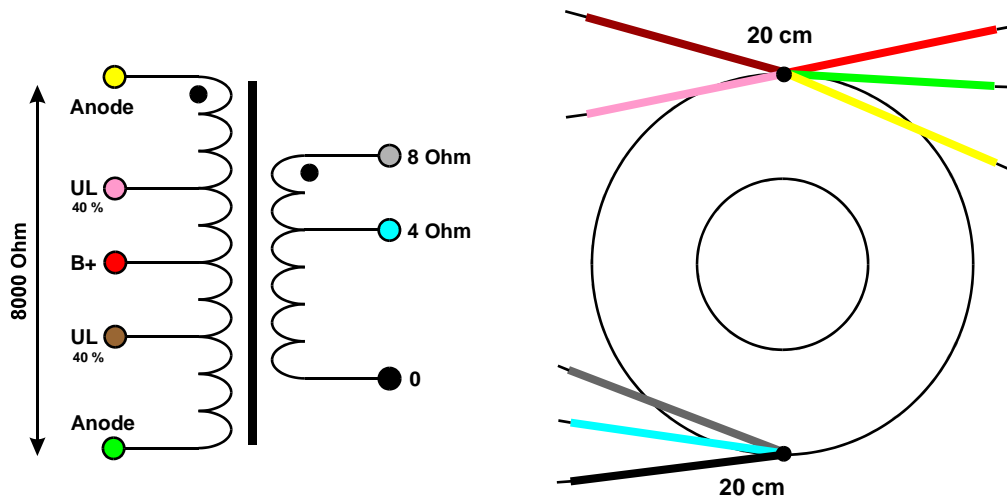


## WIDE BANDWIDTH TOROIDAL PUSH-PULL OUTPUT TRANSFORMER

Type	:	<b>VDV-8010-PPE</b>	
Application	:	2 x EL84 / 6V6 / 6L6	
Primary Impedance	:	Raa = 8.007	[kOhm]
Secondary Impedance 0 / 4 / 8	:	Rls = 8	[Ohm]
Turns Ratio Np/Ns	:	Ratio = 31.636	[ ]
UL-tap	:	tap = 40	[%]
-3 dB Frequency Range [Hz to kHz]	:	fl3 = 1.995	fh3 = 87.281
Nominal Power	:	Pn = 15	[W]
- 3 dB Power Bandwidth starting at	:	fu = 35	[Hz]
Total primary Inductance	:	Lp = 516	[H]
Primary Leakage Inductance	:	lsp = 10.5	[mH]
Effective Primary Capacitance	:	cip = 0.35	[nF]
Total Primary DC Resistance	:	Rip = 63	[Ohm]
Total Secondary DC Resistance	:	Ris = 0.4	[Ohm]
Diameter	:	Dia = 93	[mm]
Height	:	Height = 40	[mm]
Weight	:	Weight = 1.1	[kg]

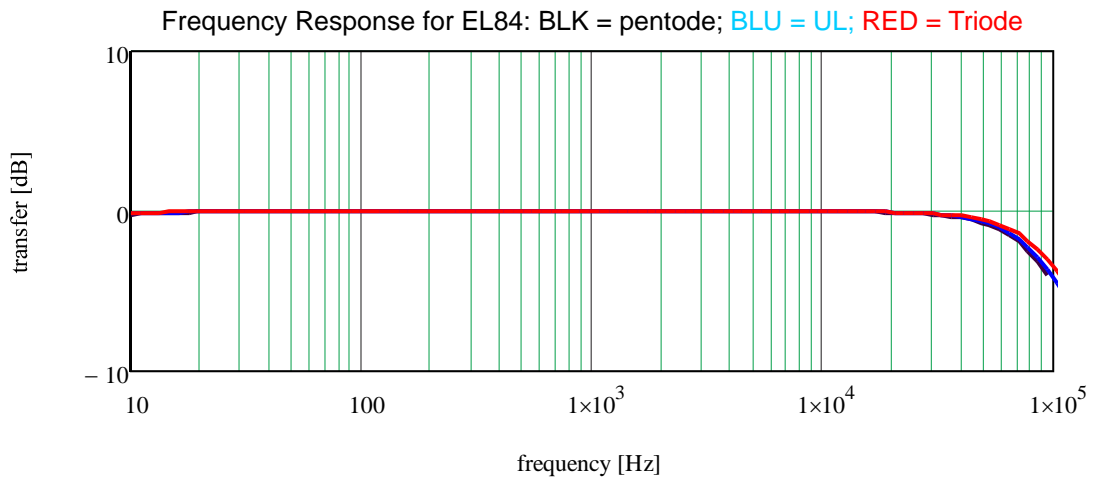

Copyright 2018 ir. bureau Vanderveen; Version 1.8. Design Date: 07-05-2018.  
Final specs can deviate 15% or improve without notice