
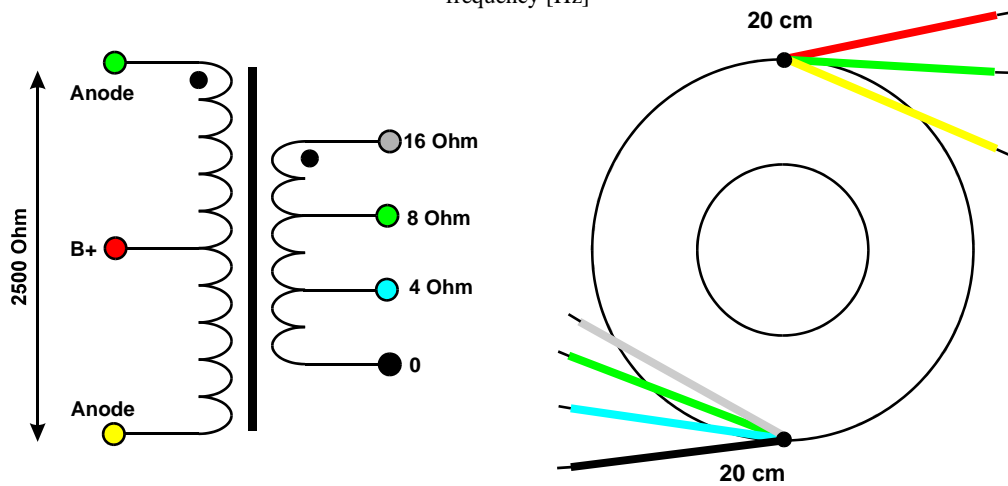


TOROIDAL PUSH-PULL OUTPUT TRANSFORMER for GUITAR AMPLIFIERS

Type	:	VDV-25100-GUITAR
Application	:	4 x EL34 / 6L6 / 6550
Primary Impedance	:	Raa = 2.479 [kOhm]
Secondary Impedance 0 / 4 / 8 / 16	:	Rls = 4 [Ohm]
Turns Ratio Np/Ns	:	Ratio = 24.897 []
-3 dB Frequency Range [Hz to kHz]	:	fl3 = 1.466 fh3 = 138.228
Nominal Power	:	Pn = 100 [W]
Total Primary Inductance (Vtest=200)	:	Lp = 250 [H]
Total Primary DC Resistance	:	Rip = 46 [Ohm]
Secondary DC Resistance at Rls-taps	:	Ris = 0.11 [Ohm]
Diameter	:	Dia = 120 [mm]
Height	:	Height = 50 [mm]
Weight	:	Weight = 1.65 [kg]

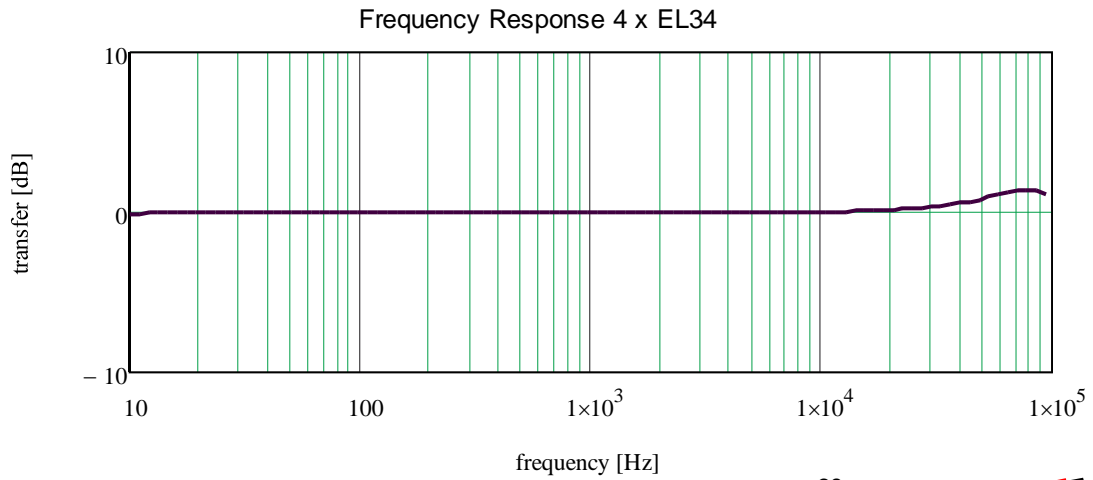

Copyright 2018 ir. bureau Vanderveen; Version 1.8. Design Date: 27-09-2019.
Final specs can deviate 15% or improve without notice