
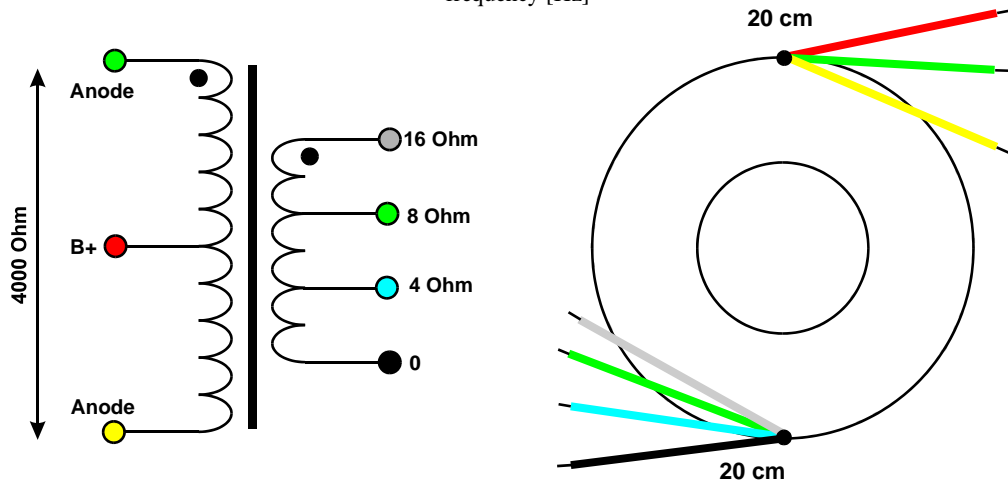


## TOROIDAL PUSH-PULL OUTPUT TRANSFORMER for GUITAR AMPLIFIERS

Type	:	<b>VDV-4050-GUITAR</b>
Application	:	2 x EL34 / 6L6 / 6550
Primary Impedance	:	Raa = 3.949 [kOhm]
Secondary Impedance 0 / 4 / 8 / 16	:	Rls = 4 [Ohm]
Turns Ratio Np/Ns	:	Ratio = 31.419 [ ]
-3 dB Frequency Range [Hz to kHz]	:	fl3 = 1.727 fh3 = 98.362
Nominal Power	:	Pn = 50 [W]
Total Primary Inductance (Vtest=200)	:	Lp = 322 [H]
Total Primary DC Resistance	:	Rip = 54 [Ohm]
Secondary DC Resistance at Rls-taps	:	Ris = 0.14 [Ohm]
Diameter	:	Dia = 95 [mm]
Height	:	Height = 45 [mm]
Weight	:	Weight = 1 [kg]

Frequency Response 2 x EL34

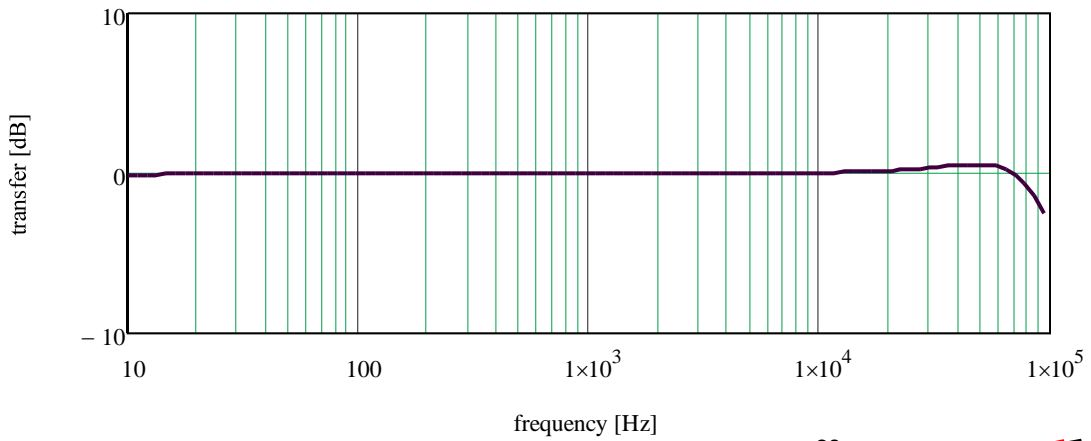

Copyright 2018 ir. bureau Vanderveen; Version 1.8. Design Date: 27-09-2019.  
Final specs can deviate 15% or improve without notice